


TSU™ 550

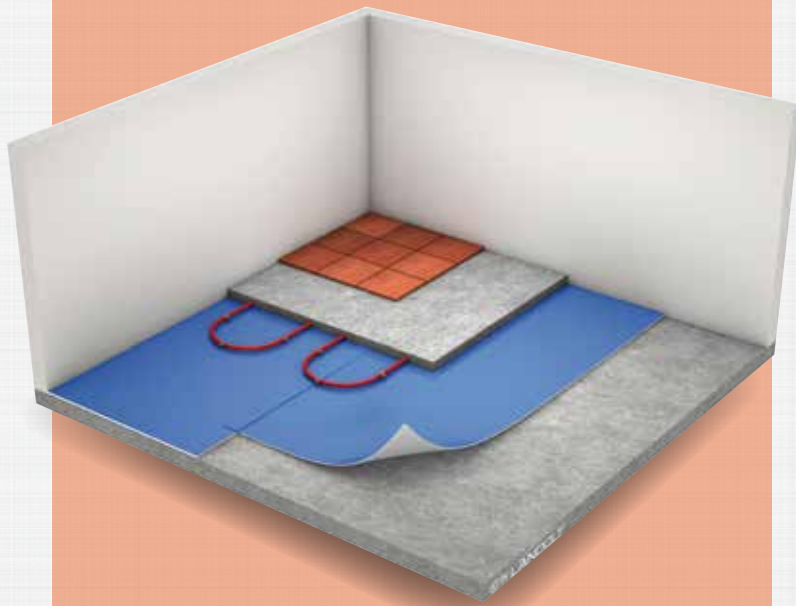

TSU™ 550 is a sound-absorbent nonwoven for floating sub-floors and screeds.

The upper surface is laminated with a blue PE sheeting with a 10 cm overlap on one side.

Functions

- ✓ For laying beneath cement subfloors and floating screeds
- ✓ Impact sound absorption with a minimum thickness (5.5 mm)

Advantages

- ✓ Easy handling and laying
- ✓ 2-in-1 product – two work steps in one
- ✓ Extremely robust

Certifications and quality controls



Strengths

- ✓ Extremely robust
- ✓ High-quality PE sheeting
- ✓ Vapor barrier



Sound absorbing



Permanent elasticity



OK for in-floor heating



Moisture barrier integrated

For further information

please see the datasheet at
www.landolt.com



www.landolt.com